


Electronic Box

For connecting the CSM and DSM mini sensors to the NivuFlow 750 transducer

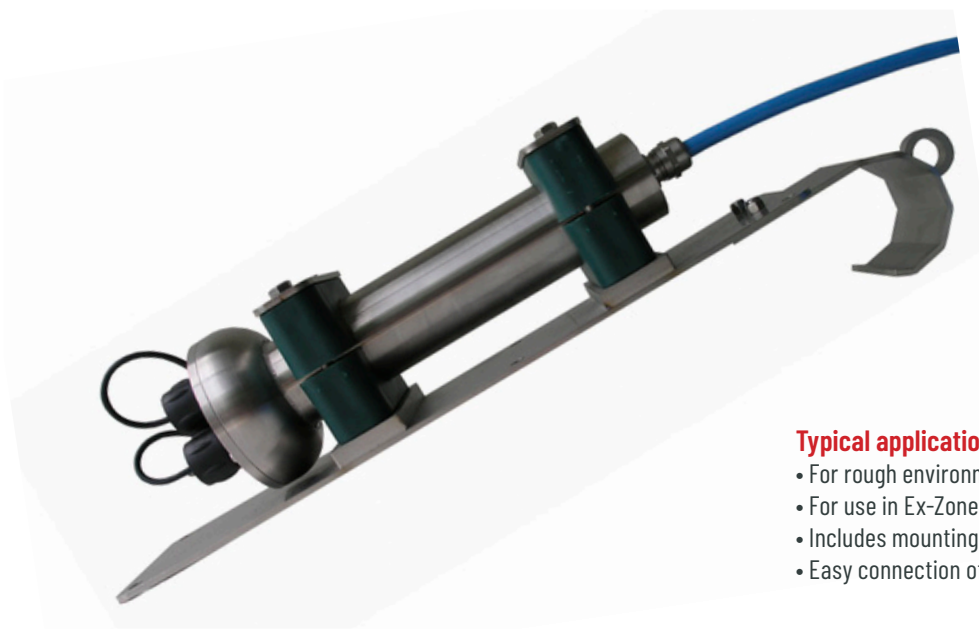

Typical applications

- For rough environments - IP 68
- For use in Ex-Zone 1
- Includes mounting bracket and mounting plate
- Easy connection of sensors via plug

Technical Specifications

Protection	IP 68 (closed connectors)
Ex-Approval	• II 2G Ex ib IIB T4 Gb (ATEX) • Ex ib IIB T4 Gb (IECEx)
Operating temperature	• -20°C to +50 °C • -20°C to +40 °C (+40 °C in Ex Zone 1)
Storage temperature	-30°C to +70 °C
Operating pressure	max. 1 bar
Medium-contacting materials	Polyurethane, stainless steel 1.4571, PP

Specifications subject to change

